


## HOW TO ATTACH THE LMF II: GERBER'S HIGHLY ADAPTABLE 10" SURVIVAL KNIFE

### Using Molle Attachments:

- 1) Place the LMF II on the chest area of the Molle vest, in the handle-down position.
- 2) Unsnap and thread the 1" wide Molle straps on the back of the sheath through the horizontal webbing of the vest on both the handle and blade portions of the sheath.
- 3) Resnap the two straps.

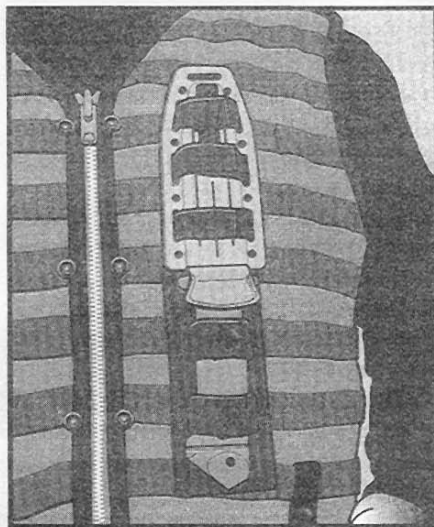

### Using The Calf Attachments. (LMF II ASEK only)

- 1) Remove the Molle attachments from the blade portion of the LMF II's sheath by opening the three Velcro fasteners and unthreading the straps from the rubberized sheath. (Fig a.)
- 2) Locate the first of two 36" straps.
- 3) Feed the bare end of one strap (you will need to unthread the strap from the male end buckle) through the twin 1" wide slots at the point-end of the sheath, beginning from the backside of the sheath. (It's a very tight fit.)
- 4) The strap should cross the front of the sheath, with each end coming out on the backside of the sheath, ready to secure around the lower calf.
- 5) Feed the bare end of the strap through the male portion of the plastic snap closure.
- 6) Locate the second 36" strap.
- 7) Feed the second strap through the Cordura loop at the top of the sheath.
- 8) Snap together the plastic snap closure on each strap.
- 9) Pull the bare end of each strap to cinch and secure the sheath to your calf.





fig. a

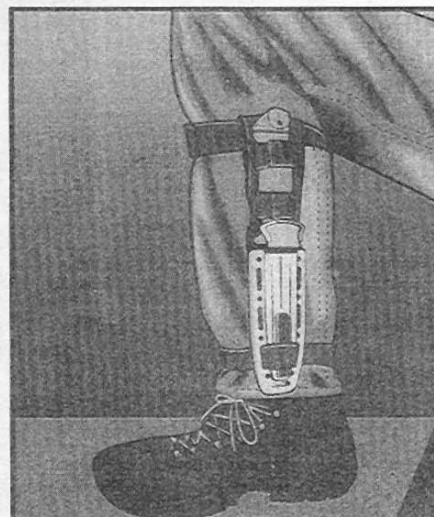

WWW.ROCKYNATIONAL.COM

### Using The Belt/Thigh Attachments.

- 1) Remove the Molle attachments from the blade portion of the LMF II's sheath by opening the three Velcro fasteners and unthreading the straps from the rubberized sheath. (fig. a)
- 2) Locate one 36" strap.
- 3) Feed the bare end of one strap (you will need to unthread the strap from the male end buckle) through the twin 1" wide slots at the point-end of the sheath, beginning from the backside of the sheath. (it's a very tight fit.)
- 4) The strap should cross the front of the sheath, with each end coming out on the backside of the sheath, ready to secure around the mid-thigh.
- 5) Feed the bare end of the strap through the male portion of the plastic snap closure.
- 6) Feed your belt through the Cordura loop at the top of the sheath.
- 7) Snap together the plastic snap closure.
- 8) Pull the bare end of the strap to cinch and secure the sheath to your thigh.







fig. a


### PLEXIGLAS

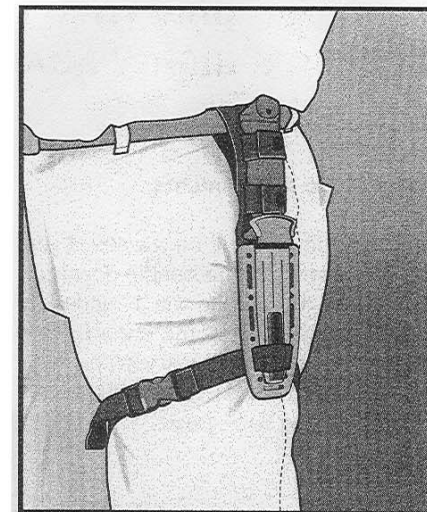

### CONVERTS TO A SPEAR



### USE AS HAMMER



### INTEGRATED SHARPENER

